

Mounted Wheels

Your Best Grinding Choice!

**BAY
UNION**

www.bayunion.com.tw



MOUNTED WHEELS - TYPE A



Standard shank	ø6 or ø6.35mm (ø1/4")
Standard abrasive	#46/#60/#80 (Pink)


MOUNTED WHEELS - TYPE B



Standard shank	ø3 or ø3.175mm (ø1/8")
Standard abrasive	#80/#100 (Pink)

MOUNTED WHEELS - TYPE W

Type	D mm	T mm	d mm	Standard spec.	Type	D mm	T mm	d mm	Standard spec.
W145	3	10	3	100 T	W196	16	25	6	60 P
W146	3	13	3	100 T	W200	19	3	6	60 Q
W149	4	6	3	100 T	W202	19	10	6	60 Q
W153	5	10	3	100 T	W203	19	13	6	60 Q
W154	5	13	3	100 T	W204	19	19	6	46 P
W162	6	10	3	100 T	W205	19	25	6	46 P
W163	6	13	3	100 T	W206	19	32	6	46 P
W164	6	19	3	100 T	W207	19	38	6	46 P
W170	8	13	3	80 Q	W208	19	50	6	46 P
W171	8	19	3	80 Q	W215	25	3	6	80 Q
W175	10	10	3	80 Q	W216	25	6	6	60 Q
W176	10	13	3	80 Q	W217	25	10	6	60 Q
W177	10	19	3	80 Q	W219	25	19	6	46 P
W178	10	25	3	80 Q	W220	25	25	6	46 P
W179	10	32	3	80 Q	W221	25	38	6	30 Q
W182	13	3	3	80 Q	W222	25	50	6	30 Q
W184	13	10	3	80 Q	W226	32	10	6	46 Q
W185	13	13	3	60 Q	W227	32	13	6	46 P
W186	13	19	3	60 Q	W228	32	19	3	30 Q
W187	13	25	6	60 Q	W229	32	25	6	30 Q
W188	13	38	6	60 Q	W230	32	32	6	30 Q
W191	16	3	6	80 Q	W231	32	38	6	30 Q
W193	16	10	6	80 Q	W236	38	13	6	30 Q
W194	16	13	6	60 Q	W237	38	25	6	30 Q
W195	16	19	6	60 Q	W238	38	38	6	30 Q

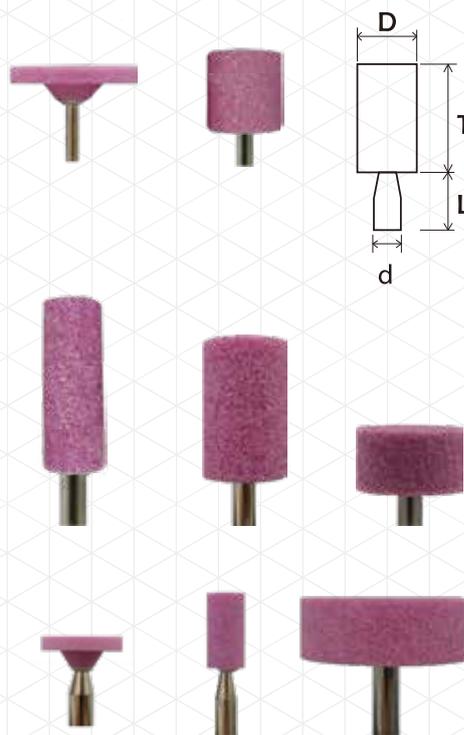

Standard shank	$\varnothing 3$ or $\varnothing 3.175\text{mm}$ ($\varnothing 1/8''$) / $\varnothing 6$ or $\varnothing 6.35\text{mm}$ ($\varnothing 1/4''$)
Standard abrasive	#80 (Pink/Orange)

MOUNTED WHEELS - TYPE L



Standard shank	$\varnothing 6$ or $\varnothing 6.35\text{mm}$ ($\varnothing 1/4''$)
Standard abrasive	#80 (Pink/Orange)

*Any other available specification and shank size can be offered on request.


MOUNTED WHEEL SET



MS-10A 25 x 40	MS-10B Ø25	MS-10C 25 x 15	MS-10D 19 x 25	MS-10L 16 x 20	MS-10F 13 x 17	MS-10G 13 x 13	MS-10H 16 x 16	MS-10I 13 x 25	MS-10J 13 x 13
-------------------	---------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------	-------------------

Standard shank	ø3 or ø3.175mm (ø1/8")/ø6 or ø6.35mm (ø1/4")
----------------	--

DENTAL MOUNTED WHEELS

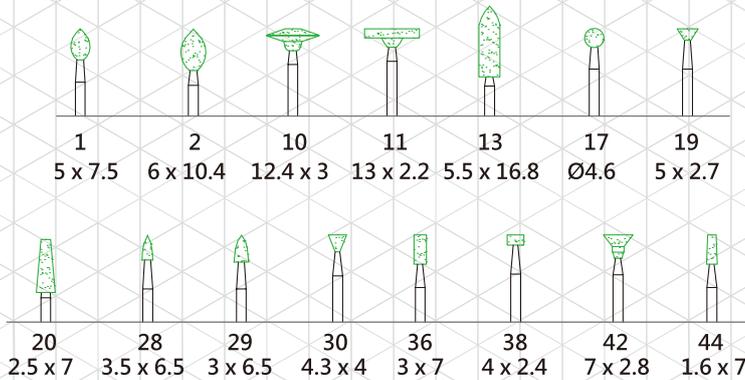

Standard shank	HP · CA : ø2.34mm (ø1/16")
	FG : ø1.6 mm (ø1/16")

PERIPHERAL SPEED & RPM

Wheel Dia. (mm)	Peripheral Speed (m/s)						
	15	20	25	30	35	40	50
5	57296	76394	95493	114592	133690	152789	190986
10	28648	38197	47747	57296	66845	76394	95493
15	19099	25465	31831	38197	44563	50930	63662
20	14324	19099	23873	28648	33423	38197	47747
25	11459	15279	19099	22918	26738	30558	38197
30	9549	12732	15916	19099	22282	25465	31831
35	8185	10913	13642	16370	19099	21827	27284
40	7162	9549	11937	14324	16711	19099	23873
45	6366	8488	10610	12732	14854	16977	21221
50	5730	7639	9549	11459	13369	15279	19099